Ink bracket installation

Version: 370-131120A

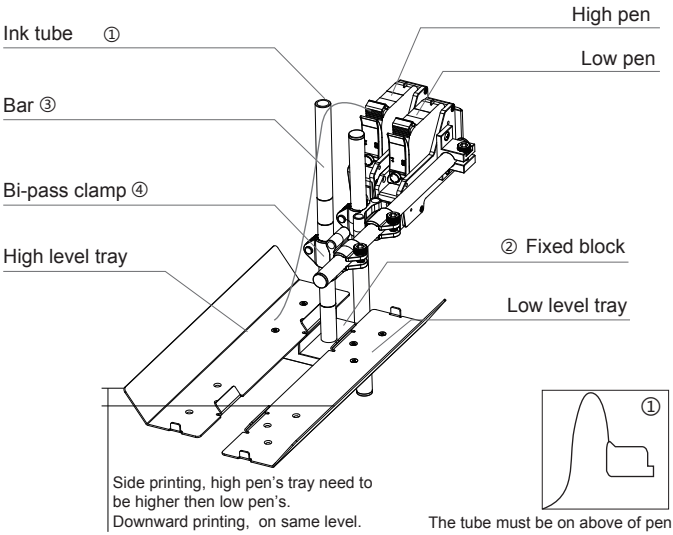

Installation tips: ②

Fixed block has step/flat surface, can be adjusted.

Side printing (2 heads)
screw A—high pen
screw B—low pen

Step surface

Side/Down (1 head)
use screw hole B

Down printing(2heads)&Down/side printing(1head)
Printhead on same level, flat surface is ok

Flat

Bi-pass clamp: ③

If leaking:

Adjust bi-pass clam downward slightly, wait for 5 minutes, until no leakage

If no printing: ④

Adjust bi-pass clam upward slightly, wait 5 minutes until no leakage, then print

Precaution:



No putting pen under bulk ink bag



No putting pen10"above bulk ink bag



If air inside tube, put cartridge lower than bulk ink bag, while ink flow out, wipe the printhead



If not in use, cap the cartridge, put in flat way, don't disconnect. Store temp:10-30℃